


# Xingto Battery 6S40AH Specifications

## 一. Scope of application

This product specification describes the performance indicators of the solid-state lithium-ion battery pack produced by **Zhuoxun Intelligent Technology (Henan) Co., Ltd.** Note: The solid-state lithium-ion battery pack described in this specification refers to a lithium-ion battery with solid-state technology (solid-liquid hybrid).

## 二.Product size

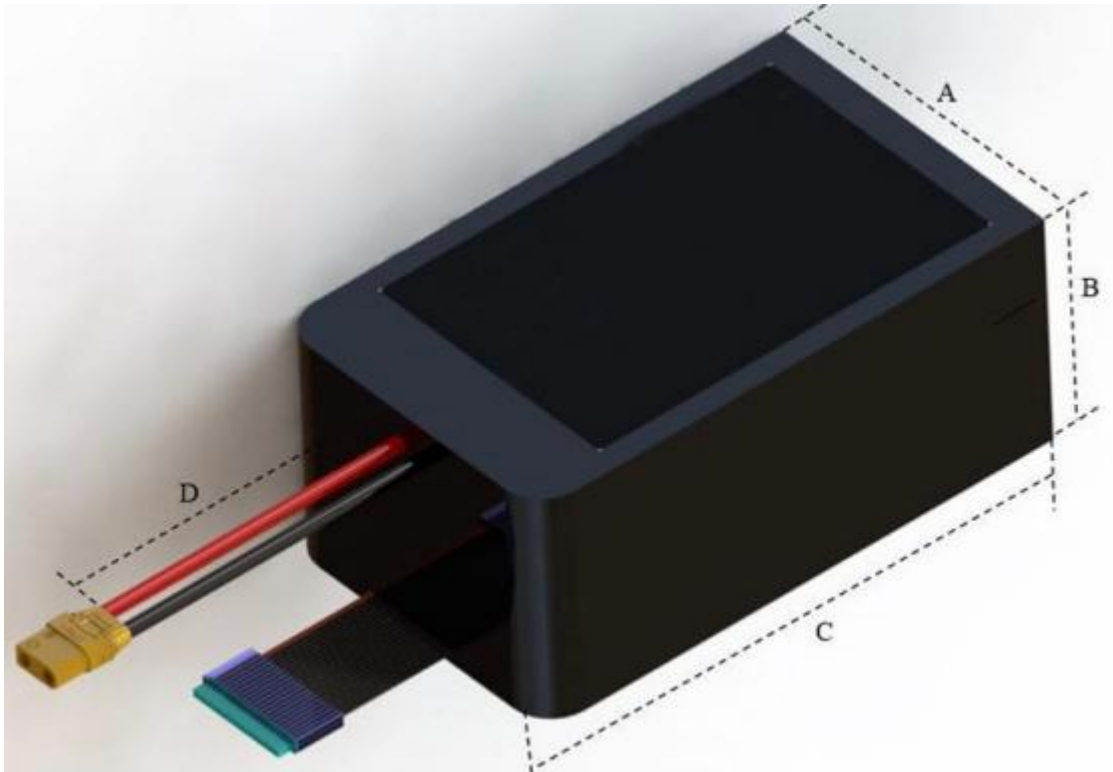

| Code | Name                 | size( $\pm 5\text{mm}$ ) |
|------|----------------------|--------------------------|
| A    | width                | 90mm                     |
| B    | Thickness (max).     | 68mm                     |
| C    | length               | 213mm                    |
| D    | Long leakage line    | $\geq 200\text{mm}$      |
|      | Power cord terminals | Optional                 |
|      | Balance head         | Optional                 |

### 三. Product Specifications

| serial number | project                  |               | Technical indicators   |
|---------------|--------------------------|---------------|--|
| 1             | Nominal capacity         |               | 40Ah (0.5C)  |
| 2             | Minimum capacity         |               | 39.5Ah (0.5C)  |
| 3             | Nominal voltage          |               | 22.2V  |
| 4             | Charging voltage         |               | 25.2V  |
| 5             | Termination voltage      |               | 15.6V  |
| 6             | Charging method          | fast          | 1C (40A) Constant current (CC) Charge to 25.2V, then constant voltage (CV)<br>Charge until the charge current is less than 0.02C (0.80A)   |
|               |                          | standard      | 0.5C (20A) Constant current (CC) Charge to 25.2V, then constant voltage (CV)<br>Charge until the charge current is less than 0.02C (0.80A) |
| 7             | Discharge method         | pulse         | 10C (400A、duration≤10S)<br>5C (200A)   |
|               |                          | Magnification | 3C (120A)  |
|               |                          | standard      | 0.5C (20A)   |
| 8             | Operating temperature    |               | Charge: 0°C~45°C<br>Discharge: -10°C~55°C  |
| 10            | Storage temperature      |               | Short-term storage (1month):-20°C~45°C Long-term storage(6 months) : -10°C~35°C  |
| 11            | Storage humidity         |               | <75%RH   |
| 12            | Internal resistance(max) |               | <15mΩ  |
| 13            | weight (max)             |               | <2.82 Kg   |
| 14            | Factory voltage          |               | 21V~21.9V  |
| 15            | Outer carton size        |               | 335*335*200mm(Please refer to the actual situation)  |
| 16            | Package weight           |               | <7.2 Kg  |

#### 四. Electrical performance test

| Serial number | project                                    | standard   | Test methodology   |
|---------------|--|--|--|
| 1             | Room temperature Discharge performance     | Discharge capacity/nominal capacity× 100%.<br>0.5C ≥100%<br>3C ≥95%                    | At 1 standard atmosphere, the ambient temperature is 20°C±5°C, and the relative humidity is ≤ 75%RH, the battery is charged at 0.5C standard constant current and constant voltage 25.2V, cut-off current of 0.02C, battery at 20°C ±5°C, respectively 0.5C, 3C current discharge until the discharge termination voltage is 15.6V. Three cycles are allowed, and when one of the criteria is met, the requirements are met. |
| 2             | Room temperature charge retention capacity | Remaining capacity ≥ nominal capacity× 90% recovery<br>capacity≥ nominal capacity×95%. | The battery is charged at 0.5C standard constant current and constant voltage at 25.2V, the cut-off current is 0.02C, left open for 28 days, and discharged at 0.5C to 15.6V, measuring the remaining capacity of the battery; 0.5C/0.5C measures the recovery capacity of the battery. Can be cycled three times when there is once the standard is met, the requirements are met.  |
| 3             | Cycle life                                 | Capacity≥80% × initial capacity  | Perform a 0.5C charge/0.5C discharge cycle, and after 800 cycles, measure the remaining capacity of the battery.<br>Perform a 0.5C charge/3C discharge cycle, and after 500 cycles, measure the remaining capacity of the battery.   |
| 4             | Low temperature discharge performance      | Capacity≥ 80% of nominal capacity ×  | After the battery is charged at 0.5C standard constant current and constant voltage, it is left at -20°C for 8h, and discharged to 15.6V at 0.5C to measure the remaining capacity of the battery.   |

|   |  |  |  |
|---|--|--|--|
| 5 | High temperature discharge performance | Capacity $\geq$ 98% nominal capacity $\times$                                | After the battery is charged at 0.5C standard constant current and constant voltage, it is left at 55°C for 4h, and discharged to 15.6V at 0.5C to measure the remaining capacity of the battery.  |
| 6 | Self-discharge                         | Capacity $\geq$ Nominal Capacity $\times$ 100%<br>Storage 1 Month $\geq$ 92% | The initial capacity of the battery was measured, after the battery was charged as standard, the initial state before storage was recorded, and after 1 month of storage at room temperature, the final state of the battery was measured, and then the discharge capacity of the battery was recorded 3 times at 0.5C/0.5C. |

## 五. Visual inspection.

It is not allowed to have any cosmetic defects that affect the performance of the battery, such as cracks, cracks, leaks, etc

## 六. Standard test environment

Unless otherwise specified, all tests in this specification are performed under the following environmental conditions:

Temperature:  $20 \pm 5$  °C

Humidity:  $\leq 75\%$  RH

Atmospheric pressure: 86KPa~106Kpa

## 七. Wrap

The packaging of the battery shall meet the requirements of moisture-proof and shockproof, and the detailed packaging is as follows:

- A single battery pack is stored using foam and an inner box;
- The outer packaging is a carton, 2 pieces per box.

## 八. Logotype

1. The following marks shall be displayed on the single battery product

- Product model
- Rated capacity, charging limit voltage
- Polarity symbol +,-
- Product barcode (information includes product model, batch number, production date information)

2. The outer wall of the packing box should have the following signs
- Product name (solid-state lithium-ion battery) product model, specification, packing quantity, packing number, factory date, etc
  - Manufacturer or trademark

## 九. Storage and other matters

### 1. Long-term storage

Long-term storage of batteries (more than 3 months) must be placed in a dry and cool place, and the battery should be charged and discharged once every 3 months, and the storage voltage is 21~21.9V (the single voltage is 3.50~3.65V), and the charging and discharging environment requirements are as described in 6.

### 2. Miscellaneous

Any matters not mentioned in this specification shall be determined by consultation between the two parties.

## 十. Shelflife and product liability

1. Shelf life: 12 months after the date of manufacture

2. Zhuo Xun Intelligent Technology (Henan) Co., Ltd. is not responsible for the operation caused by the failure to operate in accordance with the provisions of this specification, and the company will notify the purchaser when there are some changes in this specification.

## 十一. Validity period of the document

This document shall be issued from the date of publication until the date of the next amendment.

## 十二. Secrecy

This product specification cannot be disclosed to a third party without the permission of Zhuo Xun Intelligent Technology (Henan) Co., Ltd., and it is forbidden to copy or reprint.

## 十三. Release date

August 8, 2022

## 十四. Warnings and precautions.

(1) Do not throw the battery into fire or heat;

(2) Do not disassemble the battery;

(3) It is strictly forbidden to immerse the battery in seawater or water, and it should be placed in a cool and dry environment when not in use;

(4) It is forbidden to use the battery next to a hot and high temperature source, such as a fire, a heater, etc;

Building 2, Phase 1, Jiatu, High-tech Zone, Zhengzhou City, Henan Province.

- 
- (5) Please use a special charger for lithium-ion batteries when charging;
  - (6) It is strictly forbidden to use batteries by reversing the positive and negative poles;
  - (7) It is strictly forbidden to plug the battery directly into the power outlet;
  - (8) It is forbidden to use metal to directly connect the positive and negative electrodes of the battery for short circuit;
  - (9) It is forbidden to transport or store batteries with metals, such as hairpins, necklaces, etc.;
  - (10) It is forbidden to knock or throw, or step on the battery;
  - (12) It is forbidden to directly weld the battery and pierce the battery with nails or other sharp objects;
  - (13) It is forbidden to use or place the battery at high temperatures (in the scorching sun or in a very hot car), otherwise it may cause the battery to overheat, catch fire or fail function, and shorten its life;
  - (14) It is forbidden to use it in places with strong static electricity and strong magnetic field, otherwise it is easy to damage the battery safety protection device and bring unsafe hidden dangers;
  - (15) If the battery leaks and the electrolyte enters the eyes, please do not rub it, rinse the eyes with clean water, and send it to a doctor immediately;
  - (16) If the battery emits peculiar smell, heat, discoloration, deformation, or any abnormality during use, storage, or charging,
  - (17) Immediately remove the battery from the unit or charger and deactivate it;
  - (18) Waste batteries should be wrapped with insulating paper to prevent fire and explosion;
  - (19) If the battery pole is dirty, wipe it with a dry cloth before use, otherwise it may cause the poor contact function to fail.